

(1) CMAlifts®

MERCURY AND FEBO HOME LIFTS



CMA Home Lifts point to the sky.





Quality of life and well-being of people first.

CMAlifts was inspired by this simple consideration to realize its lifting platforms. They are simple and definitive solutions to overcome existing differences in level and architectural barriers in a house. Choose with confidence between our two creations: FEBO, our 100% electric platform, and MERCURY, our traditional hydraulic platform, relying on a company who has long cared about their users.

Overcoming any installation constraints with a traditional elevator is now possible thanks to CMAlifts products which are renowned for their safety, flexibility, minimum encumbrance and low energy consumption. Our quality is certified by the most severe international standards.

Our platforms comply with the latest Machinery Directive 2006/42/ EC, and hold the EU Declaration of Conformity issued by IMQ Italia.

Our creations are high VALUE to your home.



FEBO 230V

Our FEBO platform uses the existing electrical system of your building and consumes up to 0.5kW in motion (for rated speed of 0.30m/s - NON EC - rated power of 0.9 kW)

FEBO ENERGY

With system integrated batteries, it consumes up to 0.2kW in motion. Currently available with a rated speed feature of 0.15m/s.

ENERGY SAVING

A system that reduces energy consumption to practically zero when the platform is motionless at a landing, also thanks to the lighting timer which switches off the lights reducing furthermore the platform energy consumption.

Lights switch on automatically when calling the lift.

SMART CHECK

On all FEBO platforms, "Smart Check" is an intelligent monitoring system which checks and prevents potential battery failure. Furthermore, in the event of a blackout, the platform continues to operate thanks to its energy autonomy.

COMFORT AND SAFETY

Travel comfortably and safely



BLOCK SECURITY


A system that works together with the antitheft system installed in the building which blocks the platform at the floor in case of a break-in.



REMOTE CONTROL

It allows to control and operate the machine through a simple SMS. For example, it is possible to receive real-time communications in the event of a fault and, accordingly, unblock the plant from a remote location.

It is also possible to pre-set the parking of the platform at specific times of the day so that the user can have the machine ready at the desired landing and desired time of the day.

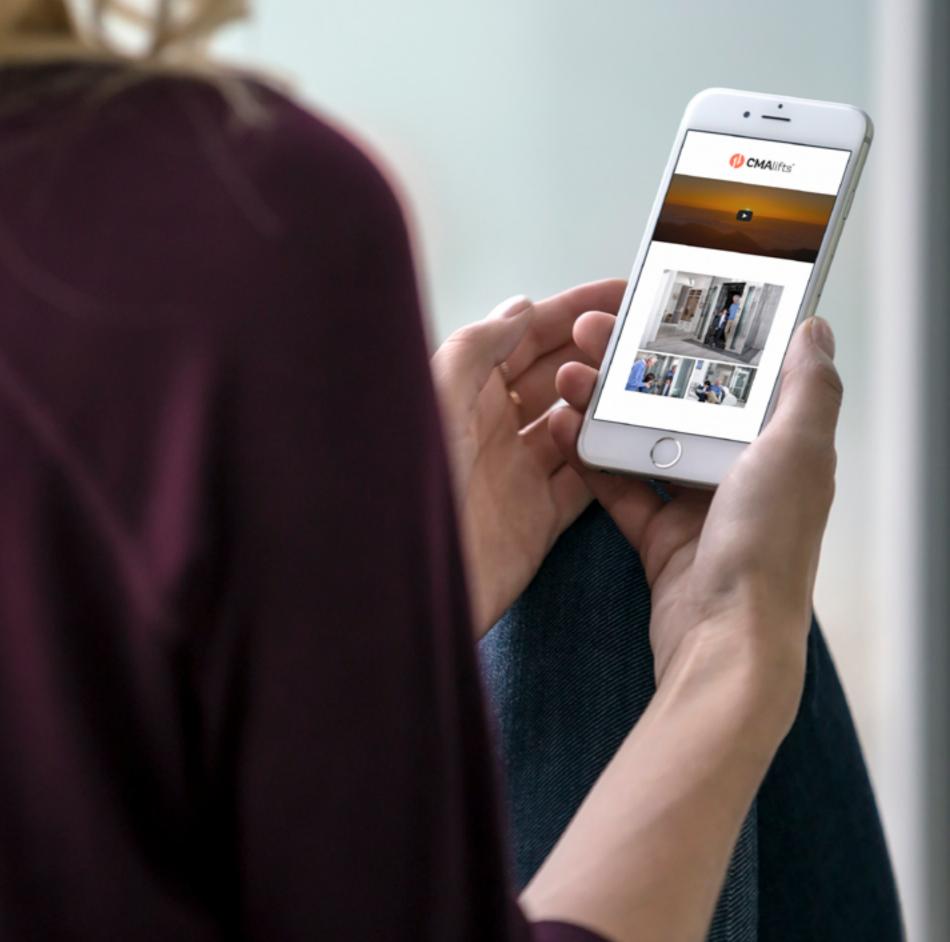



PASSENGER SAFETY

Automatic transport to specific landing in case of black-out or electrical faults (not concerning safety circuits). PASSENGER SAFETY also ensures the opening of the landing doors and guarantees an incomparable travel comfort without jolts or turbulences.

Only for **FEBO** platform: uncontrolled movement monitoring system.

3

High stop precision at landing level.

Only "Gearless" engine **FEBO** platforms are guarantee of robustness and reliability.

SAFETY
An all inclusive feature
of our products, since safety
is not an option!

Reduced maintenance thanks to a proven technology system and robustness of its components.

Travel comfort thanks to its silence feature and stop precision.

Landing signal of "busy", "lift arrival" and "floor level".

In the event of battery failure, FEBO platforms continue operating normally with electrical power.


WHAT PRODUCT TO CHOOSE? FEBO OR MERCURY?

System changes, same quality

WHEN MERCURY? If there is sufficient room in your building to hold a hydraulic power pack unit control cabinet. Thanks to its hydraulic drive, MERCURY requires minimal maintenance. Furthermore, it is easy to install and is the ideal solution to overcome smaller level differences.




WHEN FEBO? If you require extreme comfort and silence. With its electric drive, FEBO is the leading cutting-edge technology available on the market. This choice is entirely environmentally friendly since the system does not work on oil, and the energy consumption is particularly low. In addition, it does not require a machine room. Optionally, the control panel can be placed directly on top of one of the landing door uprights, thus eliminating the cabinet.

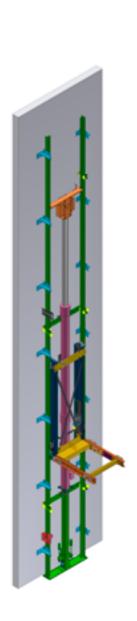

MERCURY hydraulic drive, with load capacity up to 1000kg and speed of 0.15 m/s



FEBO "Hybrid" Save power with the sunlight.

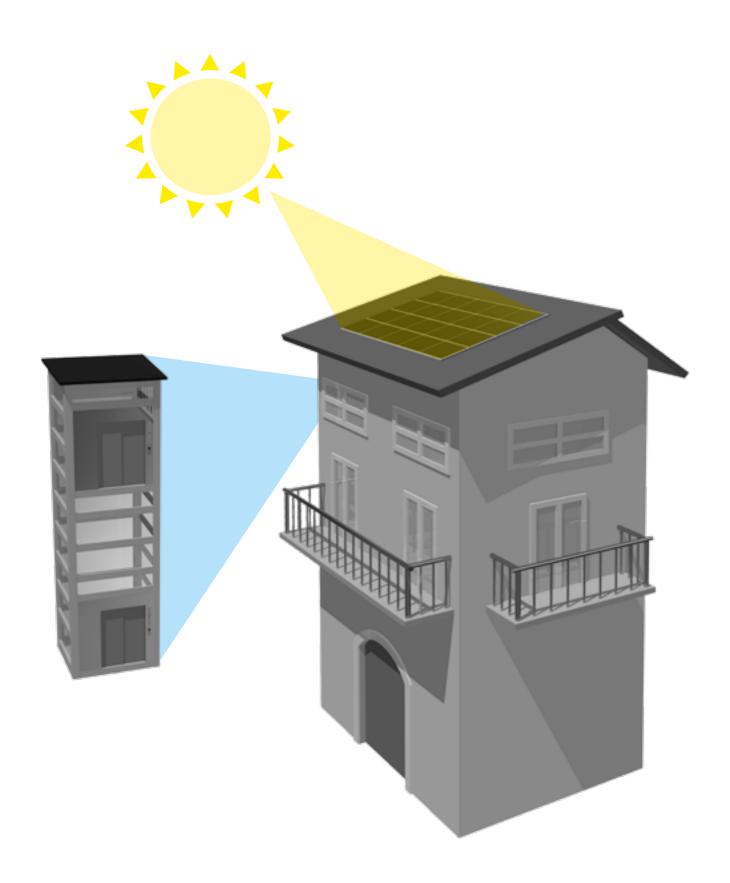

CMAlifts features a truly innovative product: FEBO Hybrid, a lift platform inspired by hybrid technology that uses solar power, thanks to photovoltaic panels, and more.

During certain phases, such as the slowing down of the lift, the plant, actually, generates electricity from the car movement, that is to say, its own motion recharges the platform.

This way, the system, coupled with solar panel technology, consumes as little as 0.5 to 0kW (in optimal operating conditions). Currently available with a rated speed feature of 0.15m/s.

FEBO Hybrid responds to a specific "must" in the field of domestic elevators: optimizing energy consumption by reducing costs. Thanks to the use of renewable energy.


FEBO Hybrid complies with the new Machinery Directive 2006/42/EC. It is available for load capacities up to 400kg with single, double or triple access, in the versions with automatic sliding doors or semi-automatic doors, automatic bus-folding cabin doors and manual hinged landing doors.

PRODUCT FEATURES


- Lower energy consumption
 - Versatile
 - Tailor-made
 - Easy to install
 - Greater convenience

FEBO'S BEATING HEART

FEBO's beating heart is the synchronous Gearless motor with SGS4 permanent magnets: a true "muscle" technology specifically designed for this type of solution. It is renowned for its high performance and supreme resistance, which makes it possible to reduce the frequency of platform maintenance. Supreme resistance, quietness and close-to-zero vibrations. The whole lot with a compact design and smaller sizes.

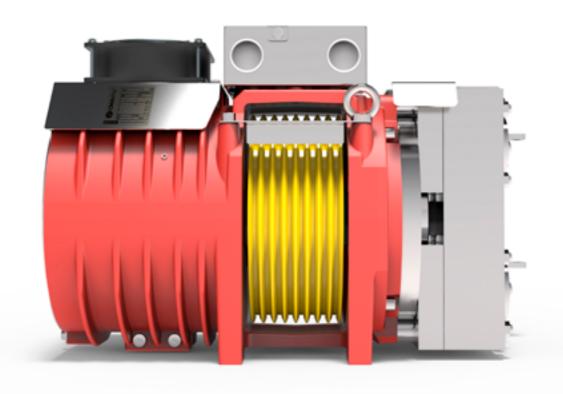



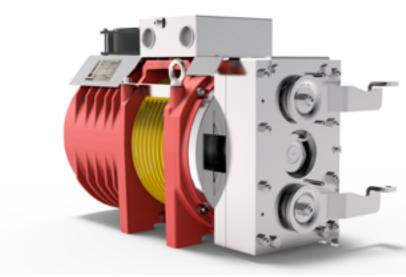

TECHNICAL FEATURES:

- Nominal load capacity in roping 2:1 400kg
- Nominal Power: 0.5kW Speed: 0.15m/s*
- Power supply: 230V 50Hz single phase
- Static load: 19.6kN 2000kg
- Standard cooling system: 16W @ 230V 50Hz
- Dimensions: 232x464x322
- Weight: 95kg

*Nominal Power 0,9kW - speed: 0,30m/s NO CE

SAVE WITH US



The tax breaks granted for the purchase of our platforms are the best investment for the future.

For example, the Italian government provides tax relief and contributions for the elimination of architectural barriers, according to Law n. 13/1989: VAT reduced to 4%, deduction of income tax of 19% on expenses incurred.



YOU DESIGN!


FEBO and MERCURY are 100% adapt to different types of buildings: with quality elements and finishes that marble floors or parquet choices. render the platform a unique highdesign ideas with products in line with laminate, steel or stone). their building requirements.

meet the diverse needs of users, and


customizable in terms of design, materials from satin or polished steel handrails and colours. All our solutions are made and fully customizable false ceilings to

tech jewel, specifically forged for your Particular attention is paid to doors home. Our wide range of options allows (automatic, semi-automatic or doublecustomers to be able to match their shutter) and cladding options (wood,

Each material becomes a new opportunity CMAlifts accessories are designed to to design a unique model. Unique exactly like yourself!

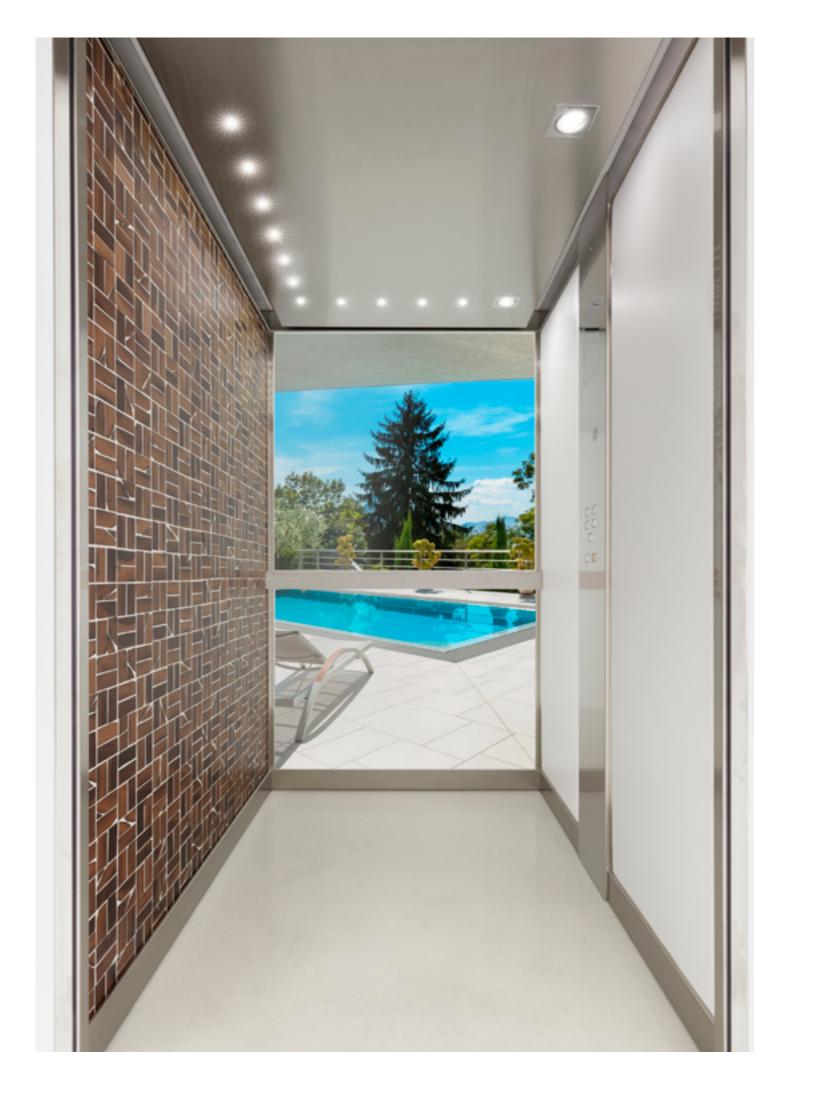




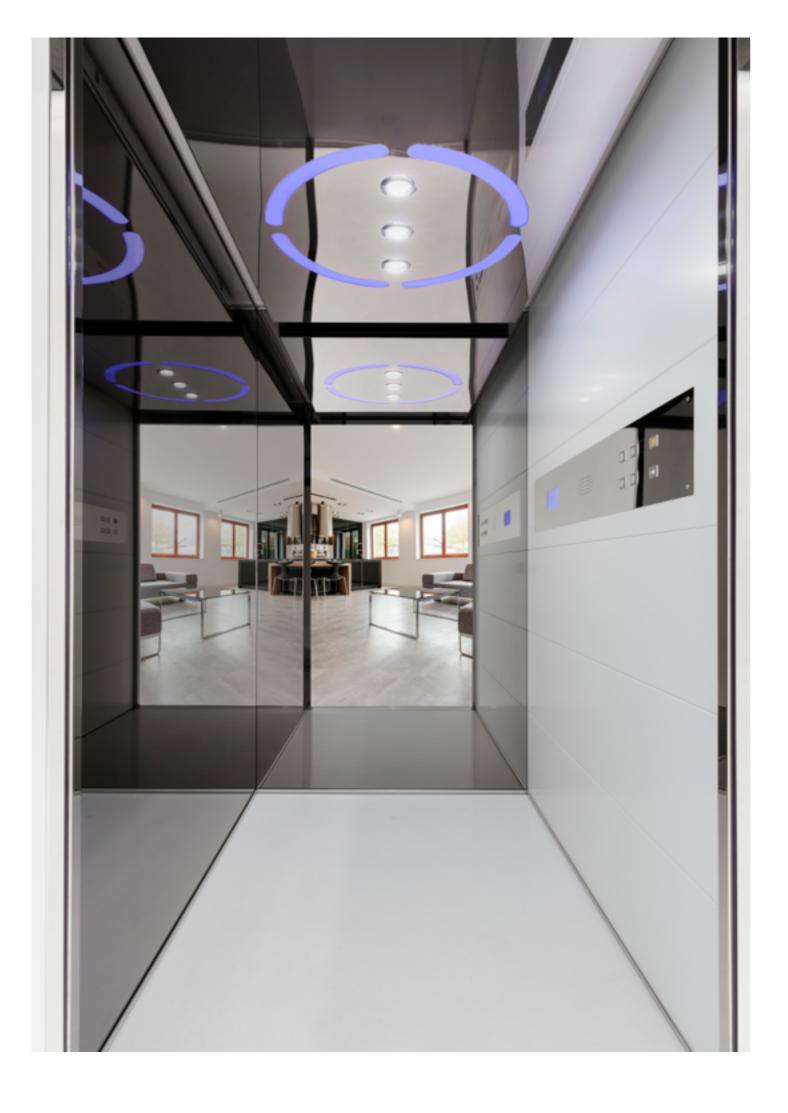






HOME LIFT MERCURY 330 - 500 - 750 - 1000 (hydraulic)


HOME LIFT FEBO 400 (electric)
















		LOAD CAPACITY	PEOPLE	CABIN DIMENSIONS width depth		DOOR OPENING RANGE (H=2000)	HOIST-WAY IN WALL width depth		HOIST-WAY WITH METAL LIFT SHAFT STRUCTURE width depth	
		KG	N°	А	В	L	С	D	С	D
HOUT	1 ACCESS	260	3	800	1200	750	1150	1400	1320	1500
		330	4	900	1400	800	1250	1600	1380	1700
		400	5	1100	1400	800	1490	1600	1600	1700
/ITH	2 OPPOSITE ACCESSES	270	3	800	1200	750	1150	1400	1320	1510
CABIN WITHO DOORS		350	4	900	1400	800	1290	1600	1440	1710
		415	5	1100	1400	800	1490	1600	1600	1710
	2 ADJACENT ACCESSES	400	5	1200	1200	800	1650	1400	1750	1510
CABIN WITH SEMI- AUTOMATIC DOORS	1 ACCESS	260	3	800	1200	750	1150	1400	1320	1510
		330	4	900	1400	800	1250	1600	1370	1710
		400	5	1100	1400	800	1490	1600	1600	1710
	2 OPPOSITE ACCESSES	270	3	800	1200	750	1150	1460	1320	1570
		350	4	900	1400	800	1290	1660	1440	1770
		415	5	1100	1400	800	1490	1660	1600	1770
	2 ADJACENT ACCESSES	400	5	1200	1200	800	1650	1400	1750	1550
RS	1 ACCESS	250	3	800	1200	750	1350	1500	1520	1620
CABIN WITH AUTOMATIC DOORS		330	4	900	1400	800	1450	1700	1600	1820
		400	5	1100	1400	800	1510	1700	1620	1820
	2 OPPOSITE ACCESSES	260	3	800	1200	750	1350	1650	1520	1760
		350	4	900	1400	800	1450	1850	1600	1960
		410	5	1100	1400	800	1510	1850	1620	1960
T A	2 ADJACENT ACCESSES	400	5	1200	1200	800	1750	1500	1850	1650
	3 ACCESSES		FOR THIS ARRANGEMENT, PLEASE CONTACT THE SALES OFFICE							
		750 - 1000	0 - 1000 FOR THIS ARRANGEMENT, PLEASE CONTACT THE SALES OFFICE							

		LOAD CAPACITY	PEOPLE	CABIN DIMENSIONS width depth		DOOR OPENING RANGE (H=2000)	HOIST-WAY IN WALL width depth		HOIST-WAY WITH METAL LIFT SHAFT STRUCTURE width depth	
		KG	N°	А	В	L	С	D	С	D
CABIN WITHOUT DOORS	1 ACCESS	260	3	800	1200	750	1210	1400	1380	1500
		330	4	900	1400	800	1310	1600	1460	1700
		400	5	1100	1400	800	1510	1600	1620	1700
	2.00000175	270	3	800	1200	750	1210	1400	1380	1510
	2 OPPOSITE ACCESSES	350	4	900	1400	800	1310	1600	1460	1710
	ACCESSES									
	2 ADJACENT ACCESSES	400	5	1200	1200	800	1650	1400	1750	1500
CABIN WITH SEMI- AUTOMATIC DOORS	1 ACCESS	260	3	800	1200	750	1210	1400	1380	1510
		330	4	900	1400	800	1310	1600	1460	1710
		400	5	1100	1400	800	1510	1600	1620	1710
	2 OPPOSITE ACCESSES	270	3	800	1200	750	1210	1460	1380	1570
		350	4	900	1400	800	1310	1660	1460	1770
	2 ADJACENT ACCESSES	400	5	1200	1200	800	1660	1400	1800	1550
CABIN WITH AUTOMATIC DOORS	1 ACCESS	250	3	800	1200	750	1350	1500	1510	1600
		330	4	900	1400	800	1450	1700	1580	1800
		400	5	1100	1400	800	1510	1700	1650	1800
	2 OPPOSITE ACCESSES	260	3	800	1200	750	1350	1650	1510	1760
		350	4	900	1400	800	1450	1850	1580	1960
	2 ADJACENT ACCESSES	400	5	1200	1200	800	1750	1500	1900	1650
	3 ACCESSES	FOR THIS ARRANGEMENT, PLEASE CONTACT THE SALES OFFICE								


PLASTIC COATED METAL SHEETS

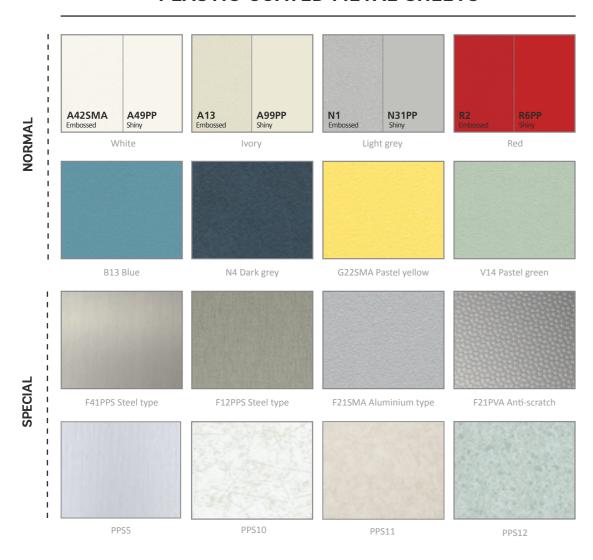


PLASTIC LAMINATES

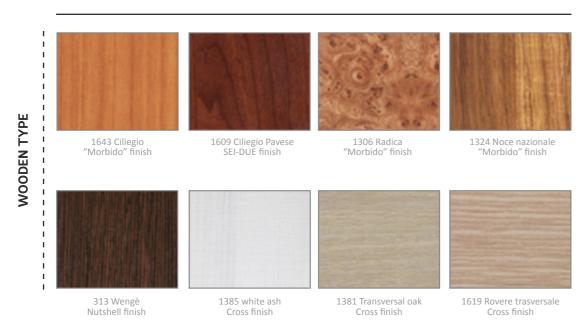

STEEL TYPES

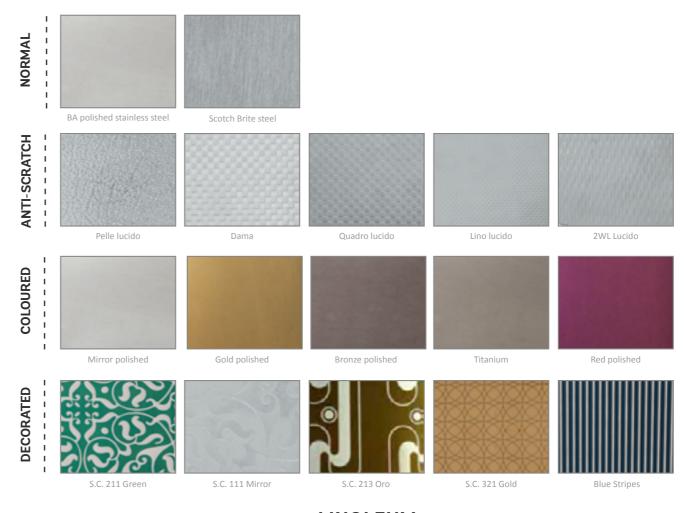


LINOLEUM

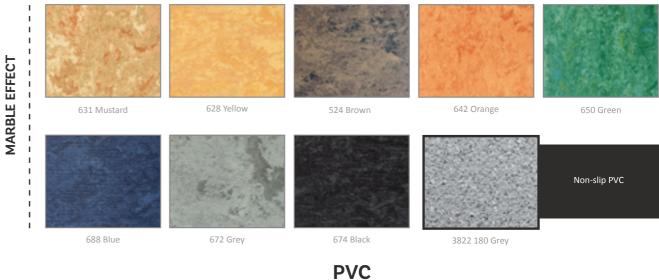




ROCKSOLID

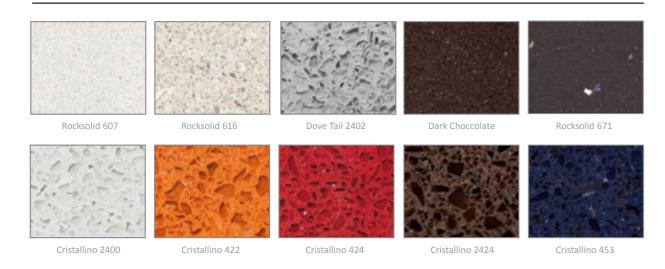

STONES

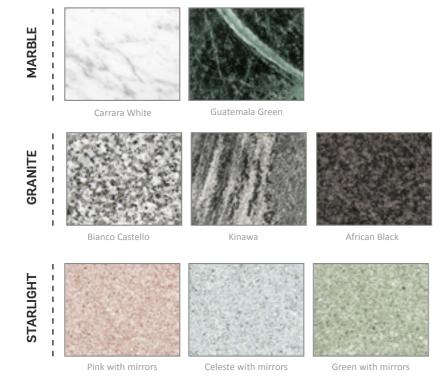


PARQUET






Different types of colours and materials are available on request. Please, contact our International Sales DPT. The colouring of materials in the above chart may not faithfully match the actual colours.

ACCESSORIES

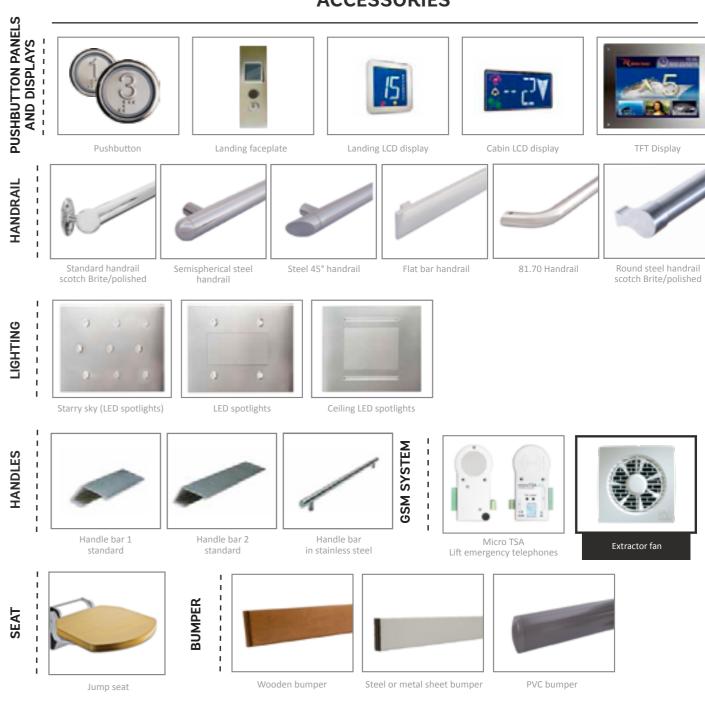

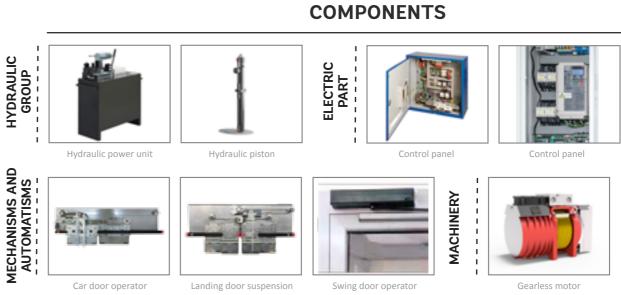

LANDING DOORFRAMES AND AUTOMATIC DOORS

DOORS:

- telescopic
- central opening
- wood clad doors
- El class fire-rated

PANORAMIC DOOR




BUS FOLDING DOOR IN SILVER-COLOUR ALUMINIUM OR ANODISED STEEL






AUTOMATIC FULL GLASS DOOR WITH DOUBLE SHUTTER

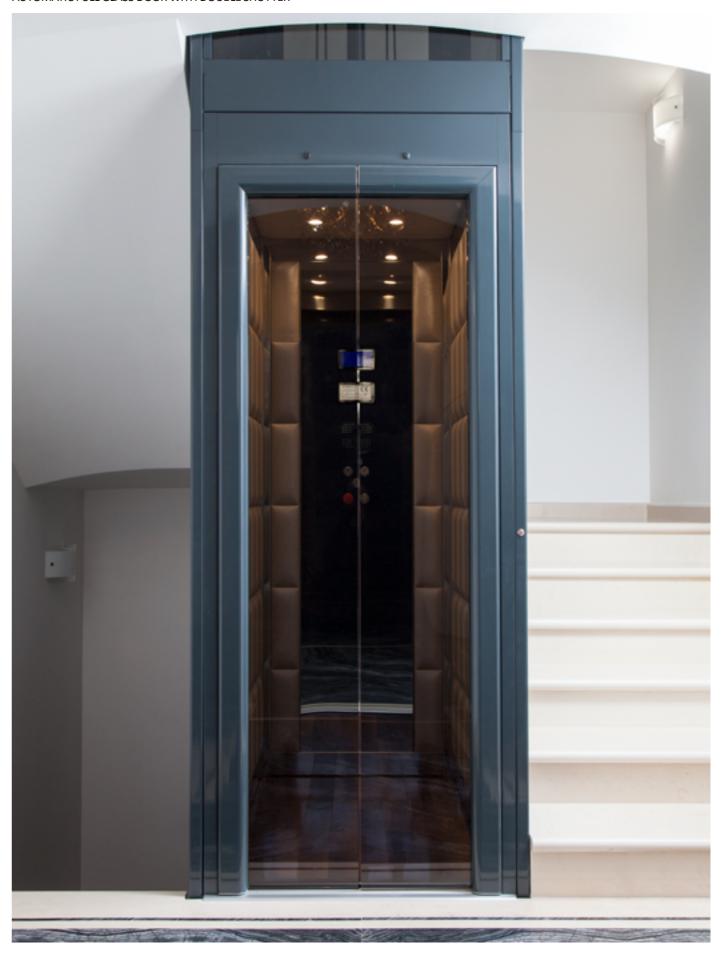

FULL GLASS WITH STEEL BINDING SCREWS

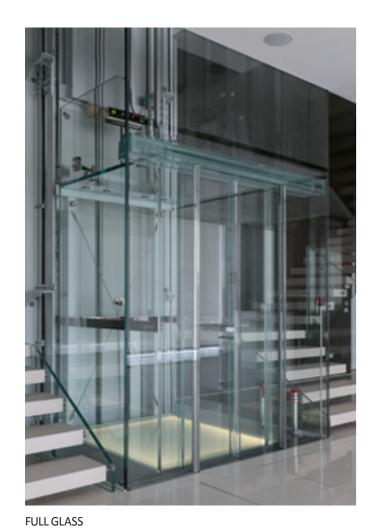

ROUND PANORAMIC

LANDING DOORFRAMES AND SINGLE-SHUTTER MANUAL DOORS

DOORS:

- Armoured door with Euro cylinder lock
- automatic (arm-lever)
- El class fire-rated door







WINDOWLESS DOOR*


WINDOWED DOOR*

PANORAMIC DOOR*

* In powder painted metal sheet with RAL colours of customer's choice



LANDING DOORFRAME WITH PANORAMIC SIDE-FRAME





FULL-GLASS, PANORAMIC, WITH A STEEL FRAME OF CUSTOMER'S CHOICE



PANORAMIC IN NATURAL ANODIZED ALUMINIUM

- wood clad or steel clad doors





CMAlifts, set up in 2001 with a far sighted vision by the brothers Giulio and Gaetano Caputo, is today a leading international company in the design, manufacturing and assembly of lifts and elevators for private and industrial use.

It is a company that has preserved a craftsmanship heart, combining futuristic high-tech solutions with the inventiveness of its employees.

CMAlifts'target market knows no boundaries. Deeply rooted in the Italian market, CMAlifts is also a protagonist in the Balkans and Northern Europe. Thanks to an increasingly widespread sectorial trade fair attendance, clients' orders from abroad have multiplied as time has gone by.

Standing strong with extensive experience, CMAlifts carefully and professionally handles all technical and design demands. The company's work method is based on the principles of professionalism and reliability, which characterize all phases from planning to production, from order management to on site delivery. No aspect of the business is handed over to external workforce (including logistics).











ISO 9001:201

ISO 14001:20

ISO 45001:2018

cmahomelifts.com



ev. 1 - 14/10/2018_Ing